


HIAVA BANSHEE - Repeat Fire Alarm

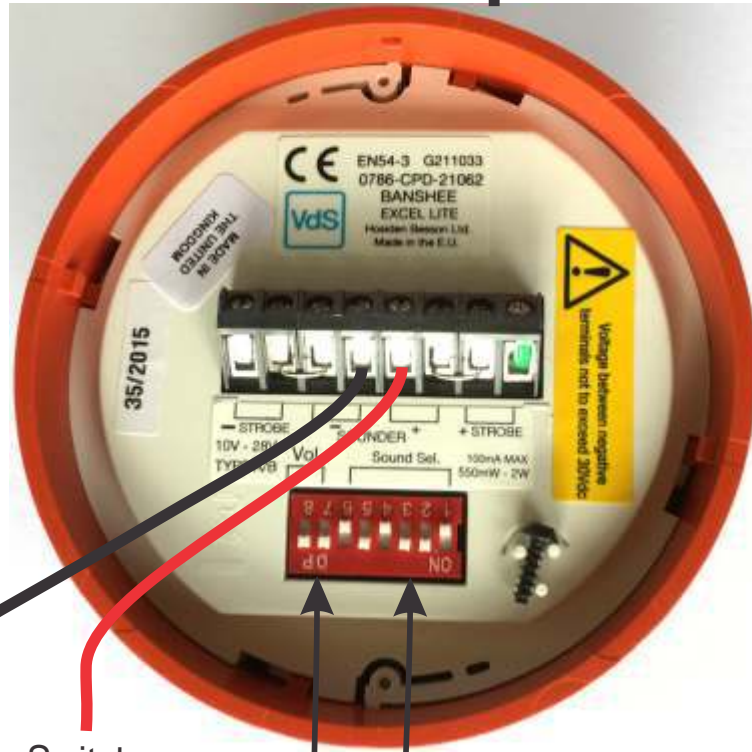

Battery -ve
FA-1 Com
Alarm -ve
Terminal 10

Switch +ve
10 - 28VDC
FA-1 Com
Alarm +ve
Terminal 7

Fire Alarm

Australian Evacuation Tone
500hz-1200hz Sweeping 3.75sec on, 0.25sec off
Set switches 1 to 5
for 01101 as depicted.

Switches 7&8 Both On
for Maximum Volume
7on 8off -10db, 7off 8on -20db.



HIAVA BANSHEE Repeat Fire Alarm

Secure Hiava Banshee box
base to bulkhead.
Extend Repeat Alarm Wire via
cable gland into box base.
Terminate -ve and +ve
to central Terminal as above.
Secure lid with alarm to box base.

ITIM SYSTEMS

PTY LTD

INNOVATIVE TECHNOLOGY FOR INDUSTRY AND MARINE
UNIT 9/45 COMMERCIAL DRIVE, SHAILER PARK QLD 4128, AUSTRALIA
ISD + 61 7. PHONE (07) 3356 1276 FAX (07) 3806 4504
<https://itim-systems.com> email info@itim-systems.com